


**Liquid level gauge with reflex glass and low/normal and high level indication.**

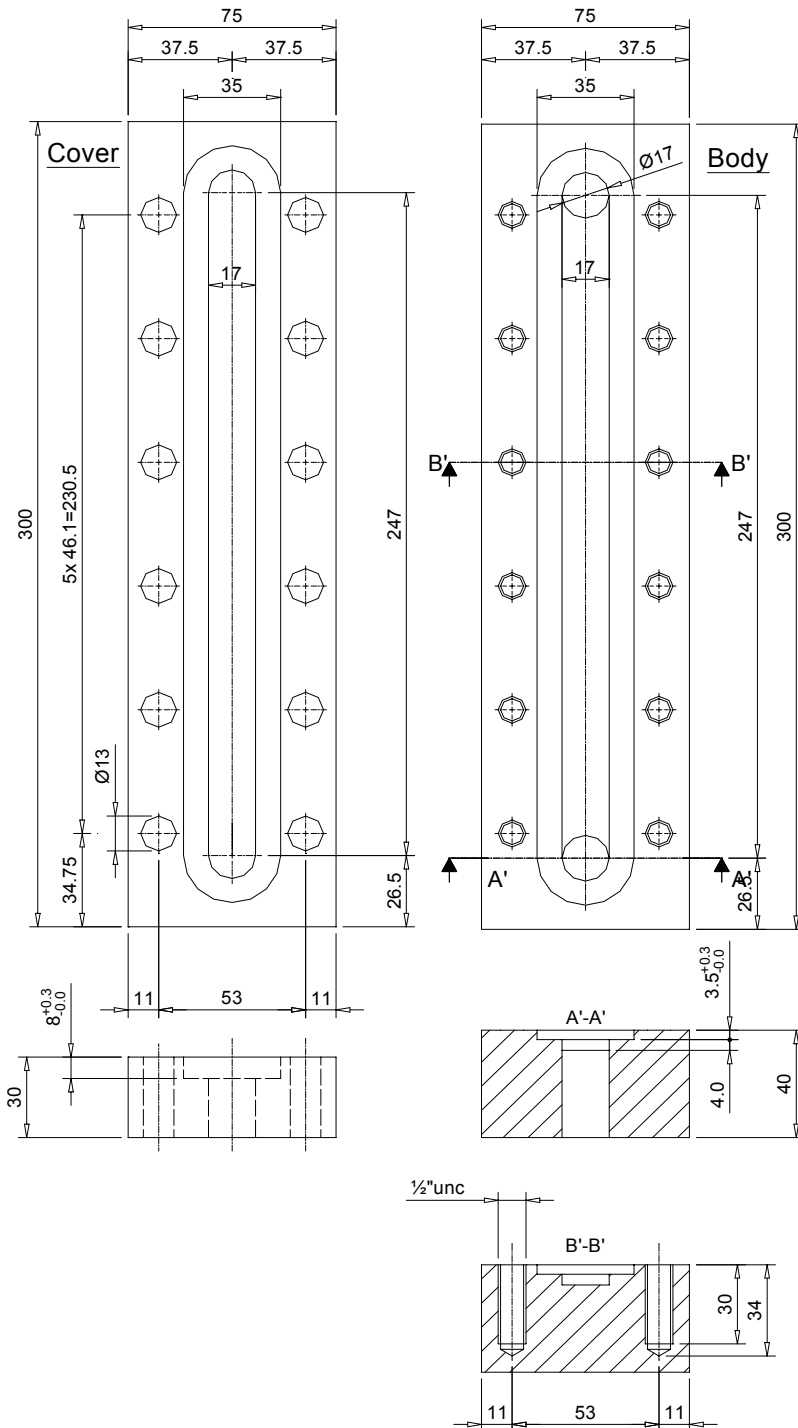

**Standard configuration:**

- Design ASME VIII, div.1 and PED 97/23/EC for EC member states.
- Qualifies for NACE MR-01-03 applications.
- Qualifies for ASME U-stamp equipment
- Max. working press. 69 bar(g) @ 200°C
- Fully stainless steel AISI 316(L).
- Self venting and self draining.

**Optional:**

- Radiused for NPS 6" shells
- Radiused for NPS 8" shells.
- Other options at request.

**Installation notes:**

- This is a delicate instrument. Do not process this gauge unless instructions are fully read and understood. For installation, operating and maintenance instructions, please refer to HPS' application department